

KOMATSU®

WD600-6

HORSEPOWER

Gross: 396 kW 530 HP @ 1800 rpm

Net: 393 kW 527 HP @ 1800 rpm

BLADE CAPACITY

8.0-10.6 m³ 10.5-13.8 yd³

ecot3

WD
600

WHEEL DOZER



Photo may include optional equipment.

WALK-AROUND

High Productivity & Low Fuel Consumption

- High performance SAA6D170E-5 engine
- Low fuel consumption
- Dual-mode engine power select system
- Variable traction control system
- Lock-up Torque Converter
- Variable displacement piston pump & CLSS (Closed-center Load Sensing System)
- Long wheelbase

See pages 4.

Excellent Operator Environment

- Automatic transmission with ECMV (Electronically Controlled Modulation Valve)
- Low-noise designed cab
- Modulated clutch system
- Engine RPM set system with auto decel
- EPC (Electronic Pilot Control) mono lever
- Pillar-less large ROPS/FOPS integrated cab
- Easy entry/exit, front-hinged door
- AJSS (Advanced Joystick Steering System)

See pages 6.



Harmony with Environment

- EPA Tier 3 and EU Stage 3A emissions certified
- Low exterior noise
- Low fuel consumption

Reliability

- Reliable Komatsu designed and manufactured components
- Sturdy main frame
- Adjustment-free, fully hydraulic, wet disc service and parking brakes
- Hydraulic hoses use flat face O-ring seals
- Cation electrodeposition process is used to apply primer paint
- Powder coating process is used to apply main structure paint
- Sealed DT connectors for electrical connections

See page 5.

HORSEPOWER

Gross: 396 kW 530 HP @ 1800 rpm

Net: 393 kW 527 HP @ 1800 rpm

BLADE CAPACITY

8.0–10.6 m³ 10.5–13.8 yd³



Photo may include optional equipment.

Easy Maintenance

- EMMS (Equipment Management Monitoring System)
- VHMS (Vehicle Health Monitoring System) (Optional)
- Ease of radiator cleaning
- Modular radiator core system

See page 5.

HIGH PRODUCTIVITY AND LOW FUEL CONSUMPTION



High Performance SAA6D170E-5 Engine

Electronic Heavy Duty Common Rail fuel injection system provides optimum combustion of fuel. This system also provides fast throttle response to match the machine's powerful tractive effort and fast hydraulic response.
Net: 393 kW 527 HP

Low Emission Engine

This engine is EPA Tier 3 and EU Stage 3A emissions certified, without sacrificing power or machine productivity.

Low Fuel Consumption

The fuel consumption is reduced greatly because of the low-noise, high-torque engine and the large-capacity torque converter with maximum efficiency in the low-speed range.

Dual-Mode Engine Power Select System


This wheel dozer offers two selectable operating modes— E and P. The operator can adjust the machine's performance with the selection switch.

- **E Mode:** Provides maximum fuel efficiency for general dozing.
- **P Mode:** Provides maximum power output for hard dozing operation or hill climb.

Variable Traction Control System

In limited traction situations where the operator would like to avoid tire slippage (such as sandy or muddy ground operation), operator can reduce slippage by activating the Variable Traction Control System.

The optimum rim pull (F1) is controlled by adjusting control knob from 100% to 20%.

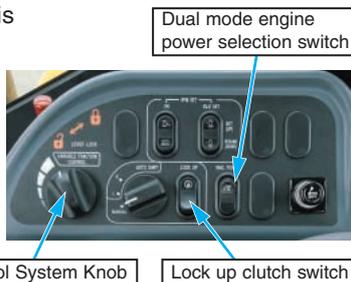


Lock-up Torque Converter

The Komatsu designed lock-up torque converter provides increased production efficiency, reduced cycle times and optimum fuel savings in hill-climb operations. This optional feature allows the operator to activate the system on/off with a switch located on the right-side control panel.


Variable Displacement Piston Pump & CLSS (Closed-center Load Sensing System)

New design variable displacement piston pump combined with the CLSS delivers hydraulic flow just as the job requires preventing wasted hydraulic pressure. Minimized waste loss contributes to better fuel economy.

- **New Variable Displacement Piston Pump:** The pump delivers only necessary amounts minimizing waste loss.

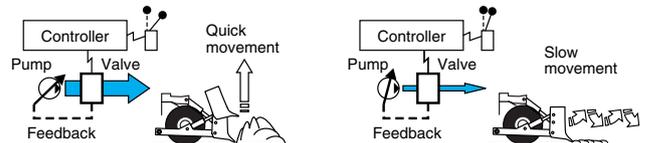

- **Fixed Displacement Piston Pump:** The pump delivers the maximum amount at any time and the unused flow is disposed.

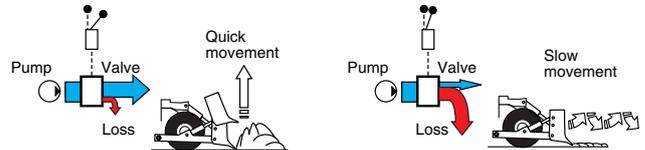

Durable Blade

Komatsu blades are manufactured using high-tensile strength steel providing excellent rigidity and increased dozing capacity.


Blade capacities: 8.0-10.6 m³ (10.5-13.8 yd³)

Built-in Blade Tilt Piping

Blade piping is built into the straight frame to protect it from damage.



RELIABILITY

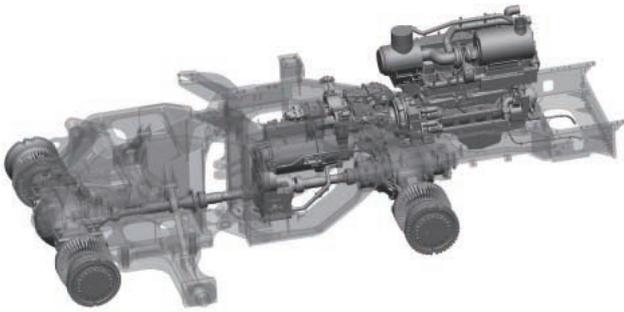

Komatsu Components

Komatsu manufactures the engine, torque converter, transmission, hydraulic units, electric parts, on this wheel dozer. Komatsu dozers are manufactured with an integrated production system under a strict quality control system.

Wet multi-disc brakes and fully hydraulic braking system mean lower maintenance costs and high reliability. Wet disc brakes are fully sealed. Contaminants are kept out, reducing wear and maintenance. Brakes require no adjustments for wear. The new parking brake is also an adjustment-free, wet multi-disc for high reliability and long life.

Added reliability is designed into the braking system by the use of two independent hydraulic circuits. Provides hydraulic backup should one of the circuits fail.

High-rigidity Frames

Front and rear frames are designed to work in the toughest applications and provide high rigidity for the power train and dozer equipment. The high-rigidity frames, together with the reinforced dozer linkage, reduce dozing stress and shock.

Limited Slip Differential (F & R) (Optional)

The field-proven limited slip differential prevents tire slippage on slippery terrain such as soft or sandy ground, so stable travel is ensured and tire wear is reduced to a minimum for maximum tire life.

Flat Face-to-Face O-Ring Seals

Flat face-to-face O-ring seals are used to securely seal hydraulic hose connections and to prevent oil leakage. In addition, buffer rings are installed to the head side of the all-hydraulic cylinders to lower the load on the rod seals and maximize the reliability.

Sealed DT Connectors

Main harnesses and controller connectors are equipped with sealed DT connectors providing high reliability, dust and corrosion resistance.

Cation Electrodeposition Primer Paint/ Powder Coating Final Paint

EASY MAINTENANCE

EMMS (Equipment Management Monitoring System)

Monitor is mounted in front of the operator for easy viewing, allowing the operator to easily check gauges and warning lights.



Maintenance Control and Troubleshooting Functions

- **Action code display function:** If abnormality occurs, the monitor displays action details on the character display at the bottom center of the monitor.
- **Monitor function:** Controller monitors engine oil level, pressure, coolant temperature, air cleaner clogging, etc. If controller finds abnormalities, the error is displayed on LCD.
- **Replacement time notice function:** Monitor informs replacement time of oil and filters on LCD when replacement intervals are reached.
- **Trouble data memory function:** Monitor stores abnormalities for effective troubleshooting.

Modular Radiator Core System


The modular radiator core is easy to replace without removing the entire radiator assembly.

Ease of Radiator Cleaning

If the machine is operating in adverse conditions, the operator can reverse the hydraulic cooling fan from inside the cab by turning a switch on the control panel.

VHMS (Vehicle Health Monitoring System) (Optional)

VHMS is a management system for large equipment for use in mining, which enables detailed monitoring of fleet via satellite communications. Komatsu and distributors can analyze "vehicle health" and other operating conditions and provide the information to job site using the internet from a remote location on a near-real time basis.

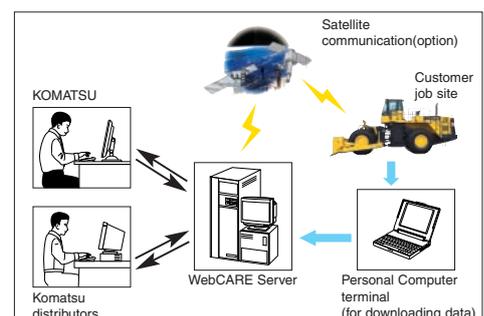

OPERATOR ENVIRONMENT


Easy Operation

Automatic Transmission with ECMV (Electronically Controlled Modulation Valve)

Automatic transmission with ECMV automatically selects the proper gear speed based on travel speed, engine speed, and other travel conditions. The ECMV engages the clutch smoothly to help prevent lag and shock when shifting. This system provides efficient machine operation for a comfortable ride.

- **Kick-down switch:**

Consider this valuable feature for added productivity. With the touch of a finger, the kick-down switch automatically downshifts from second to first when beginning the dozing. It automatically upshifts from first to second when the direction control lever is placed in reverse. This results in increased rim pull for better blade penetration and reduced cycle times for higher productivity.

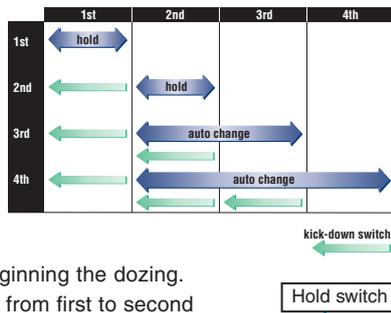


- **Hold switch:** Auto shift is selected and if the operator turns on this switch when the lever is at the 3rd or 4th gear speed position, the transmission is fixed to that gear speed.



Modulated Clutch System

The Modulated Clutch System controls the tractive effort with left brake pedal from 100% to 20% of the converter output torque.

- Useful for smooth speed reduction when approaching the end of dozing
- Easy control of tire slippage
- Reduction of shocks in shifting from forward to reverse

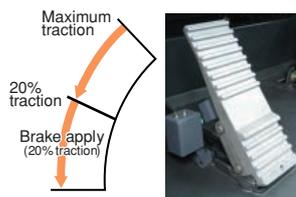

OPTIONAL EQUIPMENT

Steering Wheel with Telescopic/Tilt Column

As an alternative to the AJSS system, a steering wheel is also available. The operator can tilt and telescope the steering column to provide a comfortable working position.

Electronic Controlled Transmission Lever


Change direction or shift gears with a touch of a finger without removing the shifting hand from the steering wheel. Solid state electronics and conveniently located direction and gear shift controls make this possible. Automatic shifts in ranges 2 to 4 keep production high and manual shifting at a minimum.

EPC (Electronic Pilot Control) Mono Lever

The finger control EPC work equipment lever has light operating effort and short stroke facilitating easy operation. The operator's comfort is further increased by the full large size adjustable arm rests. Combined with CLSS, this system allows the following new functions for easy and efficient operation:

AJSS (Advanced Joystick Steering System)

AJSS is a feedback steering system which has been incorporated to allow steering and forward and reverse selection to be controlled by wrist and finger control. With the feedback function added, the machine steering angle is defined exactly the same angle as the lever tilt angle.

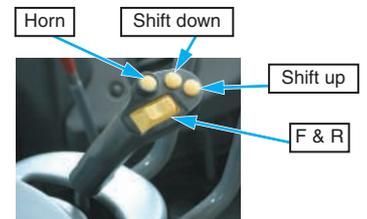

Comfortable Operation

Low-noise Design



Noise at operator's ear noise level : 76 dB(A)
Dynamic noise level (outside): 113 dB(A)

Pillar-less Large Cab

A wide pillar-less flat glass provides excellent front visibility. The wiper arm covers a large area to provide great visibility even on rainy days. The cab area is the largest in its class providing maximum space for the operator.



SPECIFICATIONS



ENGINE

ModelKomatsu SAA6D170E-5
 TypeWater-cooled, 4-cycle
 AspirationTurbocharged, aftercooled, cooled EGR
 Number of cylinders6
 Bore x stroke170 mm x 170 mm 6.69" x 6.69"
 Piston displacement23.15 ltr 1413 in³
 Governorall-speed, electronic
 Horsepower
 SAE J1995Gross **396 kW** 530 HP
 ISO 9249/SAE J1349*Net **393 kW** 527 HP
 Rated rpm1800 rpm
 Fan drive method for radiator coolingHydraulic
 Fuel systemDirect injection
 Lubrication system:
 MethodGear pump, force-lubrication
 FilterFull-flow type
 Air cleanerDry type with double elements and
 dust evacuator, plus dust indicator

*Net horsepower at the maximum speed of radiator cooling fan is 374 kW 502 HP.

EPA Tier 3 and EU Stage 3A emissions certified



TRANSMISSION

Torque converter:
 Type3-element, single-stage, double-phase
 Transmission:
 TypeFull-powershift, planetary type
 Travel speed: **km/h** mph
 Measured with 35/65-33 tires

() : Look-up clutch ON

	1st		2nd		3rd		4th	
Forward	6.7	4.2	11.7	7.3	20.3	12.6	33.0	20.5
	—		(12.4	7.7)	(21.7	13.5)	(37.7	23.4)
Reverse	7.3	4.5	12.8	8.0	22.0	13.7	36.0	22.4



AXLES AND FINAL DRIVES

Drive systemFour-wheel drive
 FrontFixed, full-floating
 RearCenter-pin support, full-floating,
 26° total oscillation
 Reduction gearSpiral bevel gear
 Differential gearConventional type
 Final reduction gearPlanetary gear, single reduction



BRAKES

Service brakesHydraulically actuated,
 wet disc brakes actuate on four wheels
 Parking brakeWet disc brake
 Emergency brakeParking brake is commonly used



STEERING SYSTEM

TypeArticulated type, full-hydraulic power steering
 Steering angle43° each direction
 Minimum turning radius at
 the center of outside tire7075 mm 23'3"



HYDRAULIC SYSTEM

Steering control:
 Hydraulic pumpPiston pump
 Capacity163 ltr/min 43.1 U.S. gal/min at rated rpm
 Relief valve setting34.3 MPa 350 kgf/cm² 4,980 psi
 Hydraulic cylinders:
 TypeDouble-acting, piston type
 Number of cylinders2
 Bore x stroke130 mm x 510 mm 5.1" x 20"

Implement control:
 Hydraulic pumpPiston pump
 Capacity180 + 180 ltr/min 47.6 + 47.6 U.S. gal/min
 at rated rpm
 Relief valve setting24.5 MPa 250 kgf/cm² 3,560 psi
 Hydraulic cylinders:
 TypeDouble-acting, piston type
 Number of cylinders—bore x stroke:
 Blade lift1- 160 mm x 1080 mm 6.3" x 42.5"
 Tilt and pitch2- 180 mm x 237 mm 7.0" x 9.3"
 Control valve3-spool type
 Control positions:
 Blade liftRaise, hold, lower, and float
 Tilt and pitchTilt-left, tilt-right, hold, pitch forward and back
 Hydraulic cycle time
 Raise2.0 sec
 Lower1.3 sec
 Tilt (left / right)0.8 / 1.1 sec
 Pitch (front / rear)2.1 / 1.6 sec




SERVICE REFILL CAPACITIES

Cooling system147 ltr 38.8 U.S. gal
 Fuel tank718 ltr 189.7 U.S. gal
 Engine86 ltr 22.7 U.S. gal
 Hydraulic system443 ltr 117.0 U.S. gal
 Axle (each front and rear)155 ltr 41.0 U.S. gal
 Torque converter and transmission83 ltr 21.9 U.S. gal



DIMENSIONS

Measured with 35/65-33-24PR(L4) tires

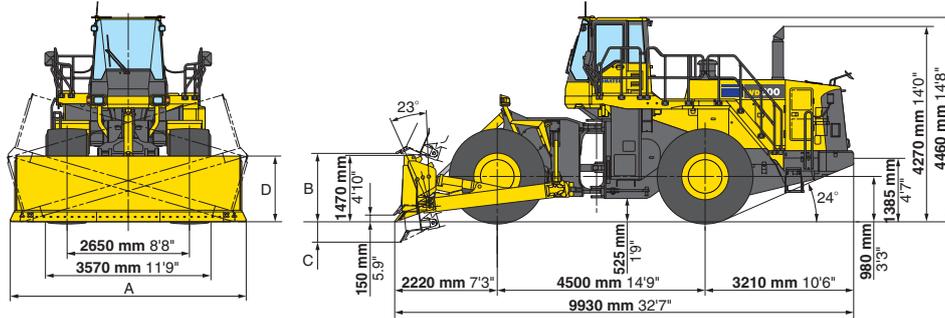

Blade type		Straight blade	U-blade
Blade capacity (SAE Rated)		8.0 m³ 10.5 yd ³	10.6 m³ 13.8 yd ³
A	Blade width	5100 mm 16'9"	4870 mm 16'0"
B	Max. lift above ground	1500 mm 4'11"	1485 mm 4'10"
C	Max. drop below ground	450 mm 1'6"	490 mm 1'7"
D	Max. tilt adjustment	1430 mm 4'8"	1340 mm 4'5"
Operating weight		48100 kg 106,040 lb	49115 kg 108,280 lb



STANDARD EQUIPMENT

- 3-spool valve for raise, lower and pitch controls
- AJSS (Advanced Joystick Steering System)
- Alternator, 90 A/24 V
- Auto air conditioner
- Auto shift transmission with mode select system
- Back-up alarm
- Back-up lamp
- Batteries, 200 Ah/12 V x 2
- Cap lock & cover lock
- Cigar lighter & ashtray
- Directional signal
- Electric supply, 12V
- Engine, Komatsu SAA6D170E-5 diesel
- Engine RPM set
- EPC fingertip control lever
- Floor mat
- Front fender
- Hard water area arrangement (corrosion resistor)
- Hydraulic-driven fan with reverse rotation
- Lift cylinder, tilt and pitch cylinders
- Lock-up clutch torque converter
- Main monitor panel with EMMS (Equipment Management Monitoring System)
- Pm service connector
- Radiator mask, lattice type
- Rear access stairs
- Rear defroster (electric)
- Rear under view mirror
- Rearview mirrors
- Rear window washer and wiper
- ROPS/FOPS cab
- Seat belt
- Seat, suspension type with reclining
- Service brakes, wet disc type
- Standard counterweight
- Starter receptacle
- Starting motor, **11.0 kW**/24 V x 2
- Straight blade, **8.0 m³** 10.5 yd³ with straight end bit
- Sun visor
- Tires (35/65-33-24PR L4 tubeless) and rims
- Transmission, 4 forward and 4 reverse



OPTIONAL EQUIPMENT

- AM/FM radio
- AM/FM radio with cassette
- Battery disconnect switch
- Emergency steering (SAE)
- Fire extinguisher
- Fuel quick coupler
- In line filter hydraulic
- In line filter steering
- Limited slip differential (F&R)
- Ordinary spare parts
- Power train guard
- Rear fender
- Steering wheel, tiltable
- Straight blade, **8.0 m³** 10.5 yd³ with angle end bit
- Tool kit
- U-blade, **10.6 m³** 13.8 yd³
- VHMS (Vehicle Health Monitoring System)

www.Komatsu.com

Printed in Japan 200905 IP.SIN (10)

KOMATSU®

CEN00367-00

Materials and specifications are subject to change without notice
KOMATSU is a trademark of Komatsu Ltd. Japan