

HORSEPOWER

Gross: 194 kW 260 HP @ 1950 rpm

Net: 184 kW 246 HP @ 1950 rpm

OPERATING WEIGHT

PC300-8: 31100–32010 kg

68,560–70,570 lb

PC300LC-8: 31600–32580 kg

69,670–71,830 lb

KOMATSU®

PC300-8 PC300LC-8

ecot3

PC
300

HYDRAULIC EXCAVATOR

S STANDARD EQUIPMENT

- Alternator, 60 Ampere, 24V
- Anti-slip plates
- Auto-decel
- Automatic engine warm-up system
- Batteries, 126 Ah/2 x 12V
- Boom holding valve
- ROPS cab (ISO 12117-2)
- Corrosion resistor
- Counterweight
- Dry type air cleaner, double element
- Electric horn
- Engine, Komatsu SAA6D114E-3
- Engine overheat prevention system

O OPTIONAL EQUIPMENT

- Additional filter system for poor-quality fuel
- Air conditioner with defroster
- Arms
 - 2220 mm 7'3" arm assembly
 - 2550 mm 8'4" arm assembly
 - 3185 mm 10'5" arm assembly
 - 4020 mm 13'2" arm assembly
- Batteries, 140 Ah/2 x 12 V
- Bolt-on top guard, (Operator Protective Guards level 2 (OPG))

SPECIAL PURPOSE BUCKET

- Ripper bucket for hard and rock ground
 - Capacity
 - SAE heaped 0.9 m³ 1.18 yd³
 - CECE heaped 0.8 m³ 1.05 yd³
 - Width 1200 mm 47.2"

www.Komatsu.com

Printed in Japan 201301 IP.As

KOMATSU®

CEN00219-08

Materials and specifications are subject to change without notice.

KOMATSU® is a trademark of Komatsu Ltd. Japan.



Photo may include optional equipment.

WALK-AROUND

Productivity Features

- **High Production and Low Fuel Consumption**

High power, working performance and fuel efficiency improve production and fuel costs.

- **Large Drawbar Pull**

Provides superb steering and slope climbing performance.

- **Large Digging Force**

Pressing the Power Max function button temporarily increases the digging force 7%.

- **Two-mode Setting for Boom**

Switch selection allows either powerful digging or smooth boom operation.

See page 5.

Large TFT LCD Monitor

- Easy-to-see and use 7" large multi-function color monitor
- Can be displayed in 12 languages for global support.

TFT : Thin Film Transistor
LCD : Liquid Crystal Display

See page 8.

Safety Design

- ROPS cab (ISO 12117-2)
- Anti-slip plates for safe work on machine
- Safety enhancement with large side-view, sidewise, and rear mirrors added.
- Rear view monitoring system for easy checking behind the machine (optional)

See page 7.



Easy Maintenance

- Long replacement interval of engine oil, engine oil filter, hydraulic oil and hydraulic filter.
- Equipped with fuel pre-filter as standard (with water separator)
- Side-by-side radiator and oil cooler configuration enables independent removal and installation of those two components.
- Equipped with the EMMS monitoring system.
- Easy access to engine oil filter and fuel drain valve
- Large fuel tank capacity

See page 9.



Photo may include optional equipment.

HORSEPOWER

Gross: 194 kW 260 HP @ 1950 rpm
Net: 184 kW 246 HP @ 1950 rpm

OPERATING WEIGHT

PC300-8: 31100 – 32010 kg
68,560 – 70,570 lb
PC300LC-8: 31600 – 32580 kg
69,670 – 71,830 lb

BUCKET CAPACITY

0.52 – 1.80 m³
0.68 – 2.35 yd³



PRODUCTIVITY & ECOLOGY FEATURES

Komatsu Technology



Komatsu develops and produces all major components, such as engines, electronics and hydraulic components, in house.

With this "Komatsu Technology," and adding customer feedback, Komatsu is achieving great advancements in technology.

To achieve both high levels of productivity and economical performance, Komatsu has developed the main components with a total control system. The result is a new generation of high performance and environment friendly excavators.

Environment-friendly Clean Engine

The PC300-8 gets its exceptional power and work capacity from a Komatsu SAA6D114E-3 engine. Output is **184 kW** 246 HP, providing increased hydraulic power and improved fuel efficiency.

Komatsu SAA6D114E-3 engine is EPA Tier 3 and EU Stage 3A emissions certified and reduced NOx emission by 40%.

The SAA6D114E-3 engine adopts the electronically controlled Heavy Duty HPCR* fuel injection system.


*HPCR : High Pressure Common Rail

Hydraulics

Unique two-pump system ensures smooth compound movement of the work equipment. HydrauMind controls both pumps for efficient engine power use. This system also reduces hydraulic loss during operation.

Low Operation Noise

Enables a low noise operation using the low-noise engine and methods to cut noise at source. Ambient noise meets the EU Stage 2 noise regulation.

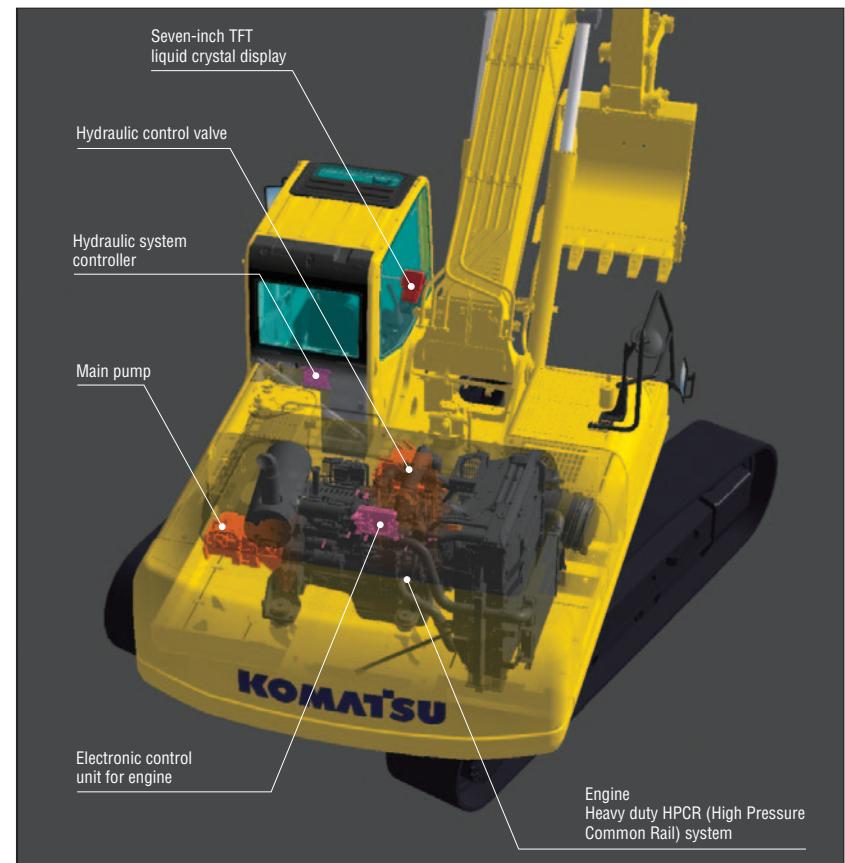

ecot3
ecology & economy - technology 3

Working Modes Selectable

Two established work modes are further improved.

P mode – Power or work priority mode has low fuel consumption, but fast equipment speed and maximum production and power are maintained.



E mode – Economy or fuel priority mode further reduces fuel consumption, but maintains the P-mode-like working equipment speed for light duty work.

You can select Power or Economy modes using a one-touch operation on the monitor panel depending on workloads.

Eco-gauge that Assists Energy-saving Operations

Equipped with the Eco-gauge that can be recognized at a glance on the right of the multi-function color monitor for environment-friendly energy-saving operations. Allows focus on operation in the green range with reduced CO₂ emissions and efficient fuel consumption.



Idling Caution

To prevent unnecessary fuel consumption, an idling caution is displayed on the monitor, if the engine idles for 5 minutes or more.



Larger Maximum Drawbar Pull

Larger maximum drawbar pull provides superb steering and slope climbing performance.

Maximum drawbar pull:
264 kN 26900 kgf
59,300 lb



Large Digging Force

With the one-touch Power Max. function digging force has been further increased. (8.5 seconds of operation)


Maximum arm crowd force (ISO):
160 kN (16.3t) → **171 kN (17.4t)** **7% UP**
(with Power Max.)

Maximum bucket digging force (ISO):
212 kN (21.6t) → **227 kN (23.1t)** **7% UP**
(with Power Max.)

*Measured with Power Max function, 3185 mm 10'5" arm and ISO rating


Smooth Loading Operation

Two return hoses improve hydraulic performance. In the arm out function, a portion of the oil is returned directly to the tank providing smooth operation.

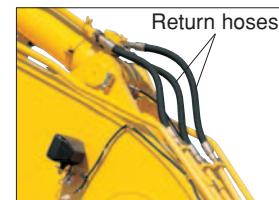

Two-mode Setting for Boom

Smooth mode provides easy operation for gathering blasted rock or scraping down operation. When maximum digging force is needed, switch to Power mode for more effective excavating.

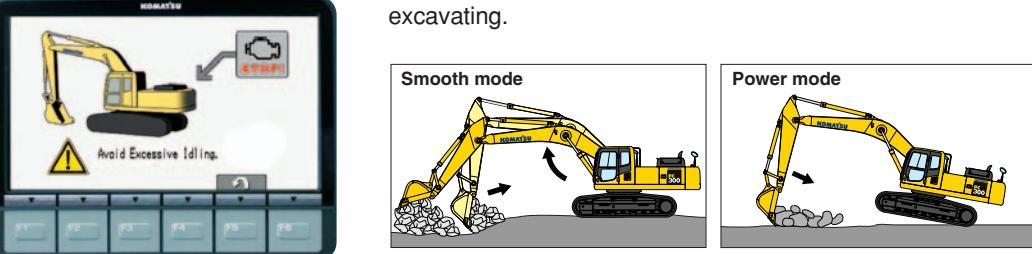

Boom floats upward, reducing lifting of machine front. This facilitates gathering blasted rock and scraping down operations.

Boom pushing force is increased, ditch digging and box digging operation on hard ground are improved.

WORKING ENVIRONMENT




Low Cab Noise

The newly-designed cab is highly rigid and has excellent sound absorption ability. Thorough improvement of noise source reduction and use of low noise engine, hydraulic equipment, and air conditioner allows this machine to generate a low level of noise.

Low Vibration with Cab Damper Mounting

PC300-8 uses viscous damper mounting for cab that incorporates longer stroke and the addition of a spring. The new cab damper mounting combined with high rigidity deck aids vibration reduction at operator seat.

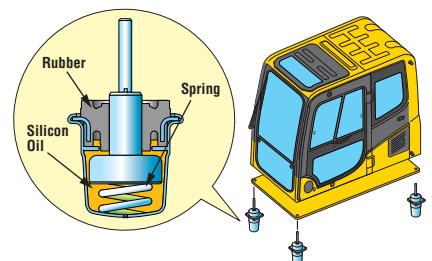

Wide Newly-designed Cab

Newly-designed wide spacious cab includes seat with reclining backrest. The seat height and longitudinal inclination are easily adjusted using a pull-up lever. You can set the appropriate operational posture of armrest together with the console.

Reclining the seat further enables you to place it into the fully flat state with the headrest attached.



Pressurized Cab


Optional air conditioner, air filter and a higher internal air pressure (+6.0 mm Aq +0.2" Aq) prevent external dust from entering the cab.

Automatic Air Conditioner (optional)

Enables you to easily and precisely set cab atmosphere with the instruments on the large LCD.




The bi-level control function keeps the operator's head and feet cool and warm respectively. This improved air flow function keeps the inside of the cab comfortable throughout the year. Defroster function keeps front glass clear.

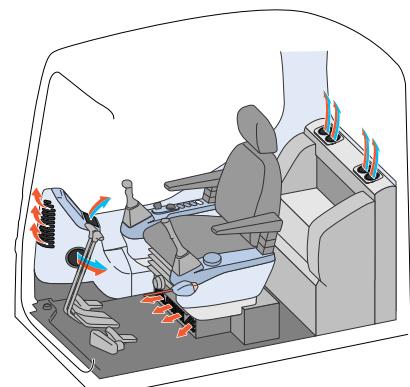

Safety Features

ROPS Cab

The machine is equipped with a ROPS cab that conforms to ISO 12117-2 for excavators as standard equipment. The ROPS cab has high shock-absorption performance, featuring excellent durability and impact strength. It also satisfies the requirements of ISO OPG top guard level 1 for falling objects. Combined with the retractable seat belt, The ROPS cab protects the operator in case of tipping over and against falling objects.

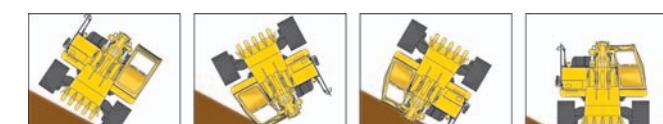

Anti-slip Plates

Highly durable anti-slip plates maintain superior traction performance for the long term.




Lock Lever

Locks the hydraulic pressure to prevent unintentional movement. Neutral start function allows machine to be started only in lock position.



Large Side-view, Rear, and Sidewise Mirrors

Enlarged left-side mirror and addition of rear and side mirror allow the PC300-8 to meet the new ISO visibility requirements.

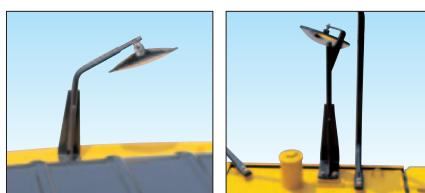

Pump/engine Room Partition

Pump/engine room partition prevents oil from spraying onto the engine if a hydraulic hose should burst.



Thermal and Fan Guards

Thermal and fan guards are placed around high-temperature parts of the engine and fan drive.

MAINTENANCE FEATURES

Large LCD Color Monitor

Large Multi-lingual LCD Monitor

A large user-friendly color monitor enables safe, accurate and smooth work. Improved screen visibility is achieved by the use of TFT liquid crystal display that can easily be read at various angles and lighting conditions. Simple and easy to operate switches. Function keys facilitate multi-function operations.

Displays data in 12 languages to globally support operators around the world.

Indicators	
① Auto-decelerator	⑤ Hydraulic oil temperature gauge
② Working mode	⑥ Fuel gauge
③ Travel speed	⑦ Eco-gauge
④ Engine water temperature gauge	⑧ Function switches menu

Basic operation switches	
① Auto-decelerator	④ Buzzer cancel
② Working mode selector	⑤ Wiper
③ Traveling selector	⑥ Windshield washer



Mode Selection

The multi-function color monitor has Power mode, Economy mode, Lifting mode, Breaker mode and Attachment mode.

Working Mode	Application	Advantage
P	Power mode	• Maximum production/power • Fast cycle time
E	Economy mode	• Excellent fuel economy
L	Lifting mode	• Hydraulic pressure is increased by 7%
B	Breaker operation	• Optimum engine rpm, hydraulic flow
ATT	Attachment mode	• Optimum engine rpm, hydraulic flow, 2 way

Lifting Mode

When the Lifting mode is selected, lifting capacity is increased 7% by raising hydraulic pressure.

EMMS (Equipment Management Monitoring System)

Monitor Function

Controller monitors engine oil level, coolant temperature, battery charge and air clogging, etc. If controller finds any abnormality, it is displayed on the LCD.



Maintenance Function

Monitor informs replacement time of oil and filters on LCD when the replacement interval is reached.



Trouble Data Memory Function

Monitor stores abnormalities for effective troubleshooting.

Easy Maintenance

Easy Radiator Cleaning

Since radiator and oil cooler are arranged side-by-side, it is easy to clean, remove and install them.




Equipped with the Eco-drain Valve as Standard

Prevents clothes and the ground from becoming contaminated due to oil leakage when replacing the engine oil.

Easy Access to Engine Oil Filter and Fuel Drain Valve

Engine oil level gauge, and fuel filter are one side mounted to improve accessibility. Engine oil filter and fuel drain valve are remotely mounted to improve accessibility.

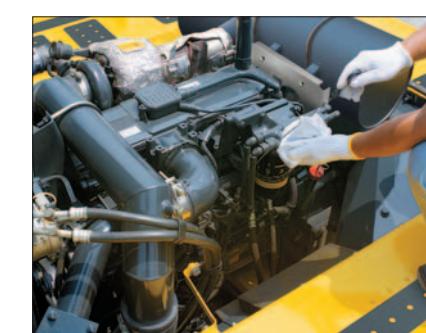

High-capacity Air Cleaner

High capacity air cleaner is comparable to that of larger machines. The larger air cleaner can extend air cleaner life during long-term operation and prevents early clogging and resulting power decrease. Reliability is improved by a new seal design.



Long Work Equipment Greasing Interval (optional)

High quality BMRC bushings and resin shims are optionally available for work equipment pins excluding bucket, extending greasing interval to 500 hours.

Equipped with the Fuel Pre-filter (with Water Separator)

Removes water and contaminants in the fuel to prevent fuel problems.



Long-life Oil, Filter

Uses high-performance filtering materials and long-life oil. Extends the oil and filter replacement interval.



Engine oil & Engine oil filter	every 500 hours
Hydraulic oil	every 5000 hours
Hydraulic oil filter	every 1000 hours



Photo may include optional equipment.

SPECIFICATIONS



ENGINE

Model	Komatsu SAA6D114E-3
Type	Water-cooled, 4-cycle, direct injection
Aspiration	Turbocharged, aftercooled
Number of cylinders	6
Bore	114 mm 4.49"
Stroke	135 mm 5.31"
Piston displacement	8.27 ltr 505 in³
Horsepower:	
SAE J1995	Gross 194 kW 260 HP
ISO 9249 / SAE J1349	Net 184 kW 246 HP
Rated rpm	1950 rpm
Fan drive type	Mechanical
Governor	All-speed control, electronic
EPA Tier 3 and EU Stage 3A emissions certified.	



HYDRAULICS

Type	HydraMind (Hydraulic Mechanical Intelligence New Design) system, closed-center system with load sensing valves and pressure compensated valves
Number of selectable working modes	4

Main pump:	
Type	Two-variable displacement piston type
Pumps for	Boom, arm, bucket, swing, and travel circuits
Maximum flow	535 ltr/min 141 U.S. gal/min
Supply for control circuit	Self-reducing valve

Hydraulic motors:	
Travel	2 x axial piston motors with parking brake
Swing	1 x axial piston motor with swing holding brake
Relief valve setting:	
Implement circuits	37.3 MPa 380 kgf/cm² 5,400 psi
Travel circuit	37.3 MPa 380 kgf/cm² 5,400 psi
Swing circuit	27.9 MPa 285 kgf/cm² 4,050 psi
Pilot circuit	3.2 MPa 33 kgf/cm² 470 psi
Hydraulic cylinders:	
(Number of cylinders – bore x stroke x rod diameter)	
Boom	2–140 mm x 1480 mm x 100 mm 5.5" x 58.3" x 3.9"
Arm	1–160 mm x 1825 mm x 110 mm 6.3" x 71.9" x 4.3"
Bucket:	for 3.19 m 10'5" and 4.02 m 13'2" Arm
	1–140 mm x 1285 mm x 100 mm 5.5" x 50.6" x 3.9"
	for 2.22 m 7'3" and 2.55 m 8'4" Arm
	1–150 mm x 1285 mm x 110 mm 5.9" x 50.6" x 4.3"



DRIVES AND BRAKES

Steering control	Two levers with pedals
Drive method	Hydrostatic
Maximum drawbar pull	264 kN 26900 kgf 59,300 lb
Gradeability	70%, 35°
Maximum travel speed: High	5.5 km/h 3.4 mph
(Auto-Shift) Mid	4.5 km/h 2.8 mph
Low	3.2 km/h 2.0 mph
Service brake	Hydraulic lock
Parking brake	Mechanical disc brake



SWING SYSTEM

Drive method	Hydrostatic
Swing reduction	Planetary gear
Aspiration	Turbocharged, aftercooled
Number of cylinders	6
Bore	114 mm 4.49"
Stroke	135 mm 5.31"
Piston displacement	8.27 ltr 505 in³
Horsepower:	
SAE J1995	Gross 194 kW 260 HP
ISO 9249 / SAE J1349	Net 184 kW 246 HP
Rated rpm	1950 rpm
Fan drive type	Mechanical
Governor	All-speed control, electronic
EPA Tier 3 and EU Stage 3A emissions certified.	



UNDERCARRIAGE

Center frame	X-frame
Track frame	Box-section
Seal of track	Sealed track
Track adjuster	Hydraulic
Number of shoes (each side):	
PC300-8	45
PC300LC-8	48
Number of carrier rollers	2 each side
Number of track rollers (each side):	

PC300-8	7
PC300LC-8	8



COOLANT AND LUBRICANT

CAPACITY (REFILLING)	
Fuel tank	605 ltr 160 U.S. gal
Coolant	32.0 ltr 8.5 U.S. gal
Engine	35.0 ltr 9.2 U.S. gal
Final drive, each side	9.0 ltr 2.4 U.S. gal
Swing drive	16.5 ltr 4.4 U.S. gal
Hydraulic tank	188 ltr 49.7 U.S. gal



OPERATING WEIGHT (APPROXIMATE)

Operating weight including 6470 mm 21'3" one-piece boom, 3185 mm 10'5" arm, SAE heaped 1.4 m³ 1.83 yd³ bucket, rated capacity of lubricants, coolant, full fuel tank, operator, and standard equipment.


Shoes	PC300-8		PC300LC-8	
	Operating Weight	Ground Pressure	Operating Weight	Ground Pressure
600 mm 24"	31100 kg 68,560 lb	62.9 kPa 0.64 kgf/cm² 9.12 psi	31600 kg 69,670 lb	59.0 kPa 0.60 kgf/cm² 8.56 psi
700 mm 28"	31460 kg 69,360 lb	54.8 kPa 0.56 kgf/cm² 7.95 psi	32200 kg 70,990 lb	51.6 kPa 0.53 kgf/cm² 7.48 psi
800 mm 31.5"	32010 kg 70,570 lb	48.5 kPa 0.49 kgf/cm² 7.03 psi	32580 kg 72,000 lb	45.7 kPa 0.47 kgf/cm² 6.63 psi



DIMENSIONS

Arm Length	2220 mm 7'3"	2550 mm 8'4"	3185 mm 10'5"	4020 mm 13'2"
A Overall length	11300 mm 37'1"	11180 mm 36'8"	11140 mm 36'7"	11170 mm 36'8"
B Length on ground (transport): PC300-8 PC300LC-8	7320 mm 24'0" 7495 mm 24'7"	6685 mm 21'11" 6860 mm 22'6"	5755 mm 18'11" 5930 mm 19'5"	5300 mm 17'5" 5475 mm 18'0"
C Overall height (to top of boom)*	3480 mm 11'5"	3450 mm 11'4"	3285 mm 10'9"	3760 mm 12'4"

	PC300-8	PC300LC-8
D Overall width	3190 mm 10'6"	3290 mm 10'10"
E Overall height (to top of cab)*	3145 mm 10'4"	3145 mm 10'4"
F Ground clearance, counterweight	1185 mm 3'11"	1185 mm 3'11"
G Ground clearance (minimum)	500 mm 1'8"	500 mm 1'8"
H Tail swing radius	3450 mm 11'4"	3450 mm 11'4"
I Track length on ground	3700 mm 12'2"	4030 mm 13'3"
J Track length	4625 mm 15'2"	4955 mm 16'3"
K Track gauge	2590 mm 8'6"	2590 mm 8'6"
L Width of crawler	3190 mm 10'6"	3290 mm 10'10"
M Shoe width	600 mm 24"	700 mm 28"
N Grouser height	36 mm 1.4"	36 mm 1.4"
O Machine cab height	2585 mm 8'6"	2585 mm 8'6"
P Machine cab width**	3090 mm 10'2"	3090 mm 10'2"
Q Distance, swing center to rear end	3405 mm 11'2"	3405 mm 11'2"

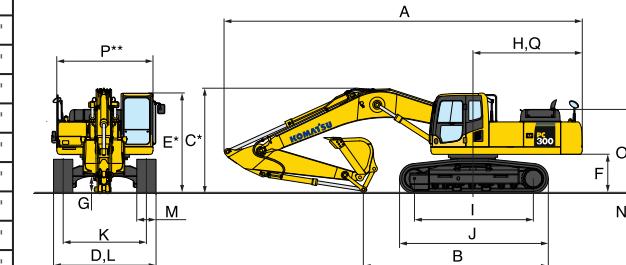


*: Including grouser height

**: Including handrail




WORKING RANGE

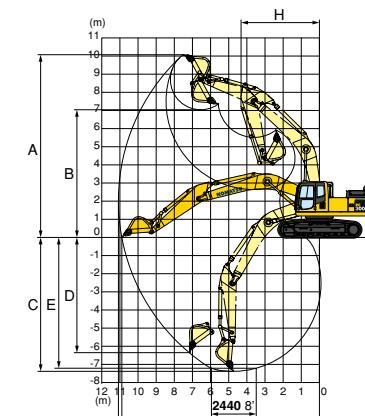

Arm	2220 mm 7'3"	2550 mm 8'4"	3185 mm 10'5"	4020 mm 13'2"
A Max. digging height	9460 mm 31'0"	9965 mm 32'8"		



LIFTING CAPACITY WITH LIFTING MODE

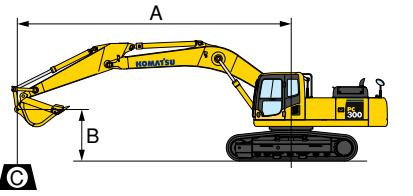

- A: Reach from swing center
- B: Bucket hook height
- C: Lifting capacity
- Cf: Rating over front
- Cs: Rating over side
- : Rating at maximum reach


PC300-8		Arm: 2200 mm 7'3"		Bucket: 1.40 m³ 1.83 yd³ SAE heaped		Shoe: 600 mm 24" triple grouser							
A	B	● MAX		9.0m 29'		7.5 m 24'		6.0 m 19'		4.5 m 14'		3.0 m 9'	
		Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.5 m 24'	*8650 kg *19,100 lb	6750 kg 14,900 lb											
6.0 m 19'	7350 kg 16,200 lb	5000 kg 11,100 lb		7450 kg 16,400 lb	5100 kg 11,200 lb	*9100 kg *20,100 lb	7700 kg 17,000 lb						
4.5 m 14'	6200 kg 13,700 lb	4150 kg 9,200 lb		7250 kg 16,000 lb	4900 kg 10,800 lb	*10250 kg *22,600 lb	7200 kg 15,900 lb	*13800 kg *30,400 lb	11600 kg 25,600 lb				
3.0 m 9'	5650 kg 12,400 lb	3750 kg 8,200 lb		6950 kg 15,300 lb	4650 kg 10,200 lb	10050 kg 22,200 lb	6700 kg 14,800 lb						
1.5 m 4'	5450 kg 12,000 lb	3550 kg 7,800 lb		6700 kg 14,800 lb	4400 kg 9,700 lb	9600 kg 21,100 lb	6250 kg 13,800 lb						
0 m 0'	5600 kg 12,300 lb	3650 kg 8,000 lb		6550 kg 14,500 lb	4250 kg 9,400 lb	9300 kg 20,500 lb	6000 kg 13,300 lb						
-1.5 m -4'	6150 kg 13,600 lb	4000 kg 8,800 lb		6500 kg 14,400 lb	4250 kg 9,300 lb	9250 kg 20,400 lb	5950 kg 13,100 lb	15150 kg 33,400 lb	9550 kg 21,100 lb				
-3.0 m -9'	7550 kg 16,600 lb	4900 kg 10,800 lb				9400 kg 20,700 lb	6100 kg 13,400 lb	*13400 kg *29,600 lb	9750 kg 21,500 lb	*14850 kg *32,700 lb	*14850 kg *32,700 lb		
-4.5 m -14'	*7750 kg *17,100 lb	7350 kg 16,300 lb				*6550 kg *14,400 lb	6450 kg 14,200 lb	*9850 kg *21,800 lb	*9850 kg *21,800 lb				

PC300-8		Arm: 2550 mm 8'4"		Bucket: 1.40 m³ 1.83 yd³ SAE heaped		Shoe: 600 mm 24" triple grouser							
A	B	● MAX		9.0m 29'		7.5 m 24'		6.0 m 19'		4.5 m 14'		3.0 m 9'	
		Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.5 m 24'	*7600 kg *16,700 lb	5750 kg 12,600 lb											
6.0 m 19'	6500 kg 14,300 lb	4450 kg 9,800 lb		7550 kg 16,700 lb	5200 kg 11,500 lb								
4.5 m 14'	5600 kg 12,400 lb	3750 kg 8,300 lb		7350 kg 16,200 lb	5000 kg 11,000 lb	*9900 kg *21,900 lb	7350 kg 16,200 lb	*13000 kg *28,600 lb	11900 kg 26,200 lb				
3.0 m 9'	5150 kg 11,400 lb	3400 kg 7,500 lb	5150 kg 11,400 lb	3400 kg 7,500 lb	7050 kg 15,500 lb	4700 kg 10,400 lb	10200 kg 22,500 lb	6850 kg 15,100 lb	*15500 kg *34,100 lb	10650 kg 23,500 lb			
1.5 m 4'	5000 kg 11,000 lb	3250 kg 7,200 lb	5000 kg 11,100 lb	3250 kg 7,200 lb	6750 kg 14,900 lb	4450 kg 9,900 lb	9700 kg 21,400 lb	6350 kg 14,100 lb					
0 m 0'	5100 kg 11,300 lb	3300 kg 7,300 lb	4950 kg 10,900 lb	3200 kg 7,000 lb	6600 kg 14,500 lb	4300 kg 9,500 lb	9400 kg 20,700 lb	6100 kg 13,400 lb	*14650 kg *32,300 lb	9500 kg 20,900 lb			
-1.5 m -4'	5550 kg 12,300 lb	3600 kg 8,000 lb			6500 kg 14,400 lb	4250 kg 9,300 lb	9250 kg 20,400 lb	6000 kg 13,200 lb	*15200 kg *33,600 lb	9550 kg 21,100 lb			
-3.0 m -9'	6600 kg 14,600 lb	4300 kg 9,500 lb			6600 kg 14,500 lb	4300 kg 9,500 lb	9350 kg 20,600 lb	6050 kg 13,400 lb	*14250 kg *31,500 lb	9750 kg 21,500 lb	*17150 kg *37,800 lb	*17150 kg *37,800 lb	
-4.5 m -14'	*7400 kg *16,400 lb	6000 kg 13,200 lb					*8300 kg *18,300 lb	6350 kg 14,000 lb	*11050 kg *24,300 lb	9950 kg 22,000 lb	*13100 kg *28,900 lb	*13100 kg *28,900 lb	

PC300-8		Arm: 3185 mm 10'5"		Bucket: 1.40 m³ 1.83 yd³ SAE heaped		Shoe: 600 mm 24" triple grouser							
A	B	● MAX		9.0m 29'		7.5 m 24'		6.0 m 19'		4.5 m 14'		3.0 m 9'	
		Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.5 m 24'	*5300 kg *11,700 lb	4950 kg 10,900 lb			*6850 kg *15,200 lb	5400 kg 11,900 lb							
6.0 m 19'	*5250 kg *11,600 lb	3950 kg 8,700 lb			*7250 kg *18,000 lb	5350 kg 11,800 lb							
4.5 m 14'	5050 kg 11,200 lb	3350 kg 7,400 lb	5350 kg 11,800 lb	3600 kg 7,900 lb	7500 kg 16,500 lb	5150 kg 11,300 lb	*9200 kg *20,300 lb	7600 kg 16,700 lb					
3.0 m 9'	4700 kg 10,300 lb	3050 kg 6,800 lb	5250 kg 11,500 lb	3450 kg 7,600 lb	7150 kg 15,800 lb	4650 kg 10,700 lb	10450 kg 23,000 lb	7050 kg 15,600 lb	*15000 kg *33,100 lb	11200 kg 24,700 lb			
1.5 m 4'	4550 kg 10,000 lb	2950 kg 6,500 lb	5050 kg 11,200 lb	3300 kg 7,300 lb	6900 kg 15,200 lb	4550 kg 10,100 lb	9900 kg 21,800 lb	6550 kg 14,500 lb	16000 kg 35,300 lb	10200 kg 22,500 lb			
0 m 0'	4600 kg 10,200 lb	3000 kg 6,600 lb	4950 kg 10,900 lb	3200 kg 7,100 lb	6650 kg 14,700 lb	4350 kg 9,600 lb	9500 kg 21,000 lb	6200 kg 13,700 lb	15400 kg 34,000 lb	9700 kg 21,400 lb			
-1.5 m -4'	4950 kg 11,900 lb	3200 kg 10,800 lb	4900 kg 7,000 lb	3150 kg 7,000 lb	6550 kg 14,400 lb	4250 kg 9,400 lb	9350 kg 20,600 lb	6050 kg 13,300 lb	15250 kg 33,				



LIFTING CAPACITY WITH LIFTING MODE

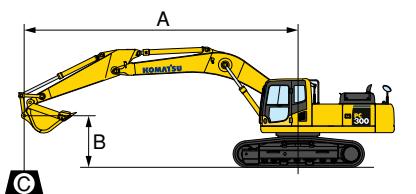

- A: Reach from swing center
- B: Bucket hook height
- C: Lifting capacity
- Cf: Rating over front
- Cs: Rating over side
- MAX: Rating at maximum reach

PC300LC-8													
		MAX		9.0 m 29'		7.5 m 24'		6.0 m 19'		4.5 m 14'		3.0 m 9'	
A		Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.5 m	24'	*8650 kg *19,100 lb	7050 kg 15,600 lb										
6.0 m	19'	*8300 kg *18,300 lb	5300 kg 11,600 lb			*8200 kg *18,100 lb	5350 kg 11,400 lb	*9100 kg 11,800 lb	8050 kg 17,700 lb				
4.5 m	14'	7350 kg 16,200 lb	4400 kg 9,700 lb			8550 kg 18,900 lb	5150 kg 11,400 lb	*10250 kg *22,600 lb	7550 kg 16,700 lb	*13800 kg *30,400 lb	12100 kg 26,700 lb		
3.0 m	9'	6700 kg 14,800 lb	3950 kg 8,700 lb			8250 kg 18,200 lb	4900 kg 10,800 lb	*11550 kg *25,500 lb	7050 kg 15,500 lb				
1.5 m	4'	6500 kg 14,300 lb	3800 kg 8,300 lb			8000 kg 17,600 lb	4700 kg 10,300 lb	11450 kg 25,200 lb	6600 kg 14,600 lb				
0 m	0'	6700 kg 14,700 lb	3850 kg 8,500 lb			7850 kg 17,300 lb	4500 kg 10,000 lb	11150 kg 24,600 lb	6350 kg 14,000 lb				
-1.5 m	-4'	7350 kg 16,200 lb	4250 kg 9,400 lb			7800 kg 17,200 lb	4500 kg 9,900 lb	11100 kg 24,400 lb	6300 kg 13,900 lb	*15500 kg *34,400 lb	10100 kg 22,200 lb		
-3.0 m	-9'	*8600 kg *19,000 lb	5200 kg 11,500 lb					*10550 kg *23,300 lb	6450 kg 14,200 lb	*13400 kg *29,600 lb	10300 kg 22,700 lb	*14850 kg *32,700 lb	*14850 kg *32,700 lb
-4.5 m	-14'	*7750 kg *17,100 lb	*7750 kg *17,100 lb					*6550 kg *14,400 lb	*6550 kg *14,400 lb	*9850 kg *21,800 lb	*9850 kg *21,800 lb		

PC300LC-8													
		MAX		9.0 m 29'		7.5 m 24'		6.0 m 19'		4.5 m 14'		3.0 m 9'	
A		Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.5 m	24'	*7600 kg *16,700 lb	6000 kg 13,200 lb										
6.0 m	19'	*7450 kg *16,400 lb	4650 kg 10,300 lb			*7850 kg *17,400 lb	5450 kg 12,000 lb						
4.5 m	14'	6650 kg 14,600 lb	3950 kg 8,700 lb			*8300 kg *18,400 lb	5250 kg 11,600 lb	*9900 kg *21,900 lb	7700 kg 16,900 lb	*13000 kg *28,600 lb	12400 kg 27,400 lb		
3.0 m	9'	6100 kg 13,500 lb	3600 kg 7,900 lb	6100 kg 13,500 lb	3600 kg 7,900 lb	8350 kg 18,400 lb	5000 kg 11,000 lb	*11300 kg *24,900 lb	7150 kg 15,800 lb	*15550 kg *34,100 lb	11200 kg 24,700 lb		
1.5 m	4'	5950 kg 13,100 lb	3450 kg 7,600 lb	6000 kg 13,200 lb	3500 kg 7,700 lb	8050 kg 17,800 lb	4750 kg 10,400 lb	11550 kg 25,500 lb	6700 kg 14,800 lb				
0 m	0'	6100 kg 13,500 lb	3500 kg 7,800 lb	5900 kg 13,000 lb	3400 kg 7,500 lb	7850 kg 17,300 lb	4550 kg 10,100 lb	11250 kg 24,800 lb	6450 kg 14,200 lb	*14650 kg *32,300 lb	10000 kg 22,100 lb		
-1.5 m	-4'	6650 kg 14,700 lb	3850 kg 8,500 lb			7800 kg 17,200 lb	4500 kg 9,900 lb	11100 kg 24,500 lb	6350 kg 14,000 lb	*16200 kg *35,700 lb	10050 kg 22,200 lb		
-3.0 m	-9'	7900 kg 17,400 lb	4550 kg 10,100 lb			7850 kg 17,400 lb	4550 kg 10,100 lb	*10550 kg *24,300 lb	6400 kg 14,100 lb	*14250 kg *31,500 lb	10250 kg 22,600 lb	*11050 kg *24,300 lb	*17150 kg *37,800 lb
-4.5 m	-14'	*7400 kg *16,400 lb	6300 kg 13,900 lb					*8300 kg *18,300 lb	6700 kg 14,700 lb	*11050 kg *24,300 lb	10450 kg 23,100 lb	*13100 kg *28,900 lb	*13100 kg *28,900 lb

PC300LC-8													
		MAX		9.0 m 29'		7.5 m 24'		6.0 m 19'		4.5 m 14'		3.0 m 9'	
A		Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.5 m	24'	*5300 kg *11,700 lb	5200 kg 11,400 lb			*6850 kg *15,200 lb	5650 kg 12,500 lb						
6.0 m	19'	*5250 kg *11,600 lb	4150 kg 9,100 lb			*7250 kg *16,000 lb	5600 kg 12,400 lb						
4.5 m	14'	*5400 kg *11,900 lb	3550 kg 7,900 lb	6350 kg 14,000 lb	3800 kg 8,400 lb	*7800 kg *17,300 lb	5400 kg 11,900 lb	*9200 kg *20,300 lb	7950 kg 17,500 lb				
3.0 m	9'	5600 kg 12,300 lb	3250 kg 7,200 lb	6200 kg 13,700 lb	3700 kg 8,100 lb	8450 kg 18,700 lb	5100 kg 13,300 lb	*10650 kg *23,500 lb	7400 kg 16,300 lb	*15000 kg *33,100 lb	11750 kg 25,900 lb		
1.5 m	4'	5450 kg 12,000 lb	3150 kg 6,900 lb	6050 kg 13,300 lb	3550 kg 7,800 lb	8150 kg 18,000 lb	4850 kg 10,600 lb	11800 kg 26,000 lb	6900 kg 15,200 lb	*16700 kg *36,900 lb	10700 kg 23,600 lb		
0 m	0'	5550 kg 12,200 lb	3200 kg 7,000 lb	5900 kg 13,100 lb	3400 kg 7,500 lb	7950 kg 17,500 lb	4600 kg 10,200 lb	11400 kg 25,100 lb	6550 kg 14,500 lb	*17550 kg *38,600 lb	10200 kg 22,500 lb		
-1.5 m	-4'	5950 kg 13,100 lb	3400 kg 7,500 lb	5850 kg 12,900 lb	3550 kg 7,400 lb	7800 kg 17,200 lb	4500 kg 9,900 lb	11200 kg 24,700 lb	6400 kg 14,100 lb	*17000 kg *37,500 lb	10100 kg 22,200 lb	*9600 kg *21,100 lb	*9600 kg *21,100 lb
-3.0 m	-9'	6850 kg 15,100 lb	3950 kg 8,700 lb			7800 kg 17,200 lb	4500 kg 10,000 lb	11200 kg 24,700 lb	6400 kg 14,100 lb	*15550 kg *34,200 lb	10200 kg 22,500 lb	*18050 kg *39,700 lb	*18050 kg *39,700 lb
-4.5 m	-14'	*7550 kg *16,600 lb	5150 kg 11,400 lb					*9750 kg *21,500 lb	6550 kg 14,500 lb	*12850 kg *28,400 lb	10500 kg 23,100 lb	*16600 kg *36,600 lb	*16600 kg *36,600 lb
-6.0 m	-19'	*6300 kg *13,900 lb	*6300 kg *13,900 lb						*8150 kg *18,000 lb	*815			